



***Providing Fiber Optic  
Solutions Worldwide***

**Amphenol**



***Fiber Systems  
International***

# About Amphenol Fiber Systems International

## About AFSI

Amphenol Fiber Systems International (AFSI) designs, manufactures, markets, and supports reliable and innovative fiber optic interconnect solutions designed to withstand the harsh environments of military, oil & gas, mining and broadcast applications. After more than a decade in business, AFSI continues to maintain its position as a global leader in fiber optic interconnect components and systems such as Termini, M28876, MIL-ST, TFOCA and the patented TFOCA-II® connector. Altogether, AFSI has delivered millions of fiber optic connectors in more than 22 countries. Whenever there is a need for superior cost-effective fiber optic systems and products able to withstand demanding operating environments, you can rely on AFSI for engineering know-how, top-quality products and expert technical support.

We are ISO 9001:2000 certified and qualified to MIL-STD-790 requirements. Furthermore, AFSI is approved by the Electronics Technicians Association (ETA) to train and administer the Fiber Optics Installer (FOI) and the Fiber Optics Technician (FOT) certifications.

For more information about AFSI, please visit our website at [www.fibersystems.com](http://www.fibersystems.com)

## About Amphenol

Amphenol was founded in 1932. The company is one of the largest manufacturers of electrical, electronic and fiber optic connectors, coaxial and flat-ribbon cable. Its activities are geared towards 7 major markets: Military & Commercial; Aerospace; Automotive; Broadband Communication; Industrial; Information Technology & Data Communication; Mobile Devices and Wireless Infrastructure. Amphenol is headquartered in Connecticut, USA and employs more than 10,000 people on a worldwide basis with manufacturing and assembly operations in the Americas, Europe and Asia.

For more information about Amphenol, please visit our website at [www.amphenol.com](http://www.amphenol.com)



# Fiber Optic Connectors for Harsh Environments

## Icons Indicate Application



**TFOCA-II® 4-Channel**  
Land Tactical Fiber Optic Connectors



**M28876**  
Shipboard Fiber Optic Connectors



**MiniTAC**  
2-Channel Hermaphroditic Connector



**MTFP Termini**  
Termini used for TFOCA-II® Connectors



**M29504 /14 & /15 Termini**  
Commercial version available



**109 Series**  
4-Channel Hermaphroditic Connector  
SMPTE 358M compliant



**TFOCA-II® 12-Channel**  
Land Tactical Fiber Optic Connectors



**M83522 MIL-ST**  
Commercial version available



**TFOCA-II® for Armored & Sheathed Cable**



**TFOCA Connector**  
Tactical Fiber Optic Cable Assembly



**NGConn**  
Next Generation Fiber Optic Connector



**PROCLEAN**  
Rugged Fiber Optic Connectors with a Screw-On Insert Cap for easy cleaning



# Fiber Optic Connectors for Harsh Environments

Icons Indicate Application



## FS4H 4-Channel

Available in Brass, Stainless Steel & Anodized Black



## FS5H 24-Channel

Available in Brass, Stainless Steel & Anodized Black



## D38999 Cable Assemblies



## Optron Connectors

Fiber Optic & Electrical Contacts For Marine & Land Applications



## DeepSight

Down-Hole Applications



## FS6H 6-Channel

Available in Brass, Stainless Steel & Anodized Black



## E-O-E System

Integrated Media Conversion Capability Active Plugs & Receptacles



## FS8H 12-Channel

Available in Brass, Stainless Steel & Anodized Black



## GoldRush®

XP Connectors for the Mining Industry MSHA Approved



## TFOCA-III® 6-Channel



## StapleMate®

For Longwall Mining Systems



## Connector Adapters

Adapters for different types of connectors



# Fiber Optic Connectors for Harsh Environments

Icons Indicate Application



**TFOCA-II® 4-Channel**  
4-Channel Connector with Integrated Patch Panel



**Tactical High Density Connectors**  
48 & 72-Channels



**TFOCA-II® 4-Channel Loopback Plug**



**TFOCA-III® 24-Channel**



**Fiber Optic Feedthru**  
High temperature, high pressure



**CTOS Expanded Beam Connector**



**M29504 / 4 & / 5 Termini**

Commercial version available



**LimeLight Cable Assemblies**

SMPTE 304M compliant



**APC Termini**

Suitable for harsh environments requiring low back reflection



**FSAF Termini**

1.25mm Tactical Termini



**FS3H 4-Channel**

4-Channel Hermaphroditic Connector  
SMPTE 358M compliant



**FS12**

Available in Brass, Stainless Steel & Anodized Black



# Fiber Optic Connectors for Harsh Environments

Icons Indicate Application



**Inspection Scope**



**Measurement Quality Jumpers**



**Termination Kits & Tools**



**Fiber Optic Training**



**Fiber Optic Test Set**



**AXOS**



**HMAtwo Expanded Beam Connector**

Compatible with HMA Connectors



**LC Field**



**MTRJ Field**



**RNJOP**



**MFM**



**TVOP**



Harsh environment fiber optic interconnect solutions are AFSI's specialty. To complement our industry leading connector product suite, we manufacture turnkey fiber optic cable assemblies and harnesses.

AFSI will custom design your assembly or build to your print. Our complimentary design services include specifying the cable, connector, labeling and spooling to meet your application and budget for your project.

All AFSI cable assemblies are manufactured by expert technicians in our state-of-the-art, ISO 9001:2000 certified facility. This ensures that our processes and practices are optimized for the unique requirements of fiber optic cable assemblies rather than one-size-fits-all electrical assemblies.



Allen, Texas Production Facility

AFSI has experience connectorizing a myriad of cable types (e.g., radiation hardened, interlocking armor, QFCI). In addition to our harsh environment connectors (TFOCA, TFOCA-II<sup>®</sup>, M28876), we offer rugged cable assemblies with 38999 and SMPTE 304M connectors. We can also connectorize the receptacle with any of the popular commercial connectors (SC, LC, FC, etc.) in either ultra polish or angle polish.

Technicians trained to MIL-STD-2042B and a variety of other procedures critical to manufacturing harsh environment fiber optic cable assemblies aim to exceed customer requirements with every assembly. An optical test report is included with every cable built. If additional tests are required, AFSI is capable of testing in-house or contracting with one of our test laboratory partners.


AFSI takes pride in its industry leading customer support and turnaround times. Our valued customers include nearly every major defense company, many major geophysical companies, and numerous broadcast equipment and service providers.



# Understanding Fiber Optics


## WHAT IS AN OPTICAL FIBER?

■ **Fiber structure and fiber types** - An optical fiber is made of 3 concentric layers:

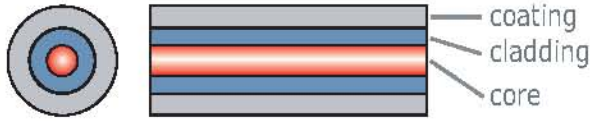

- **Core:** This central section, made of silica, is the light transmitting region of the fiber.
- **Cladding:** This is the first layer around the core. It is also made of silica, but not the same composition as the core. This creates an optical waveguide which confines the light in the core by total internal reflection at the core-cladding interface.
- **Coating:** It is the first non-optical layer around the cladding. The coating typically consists of one or more layers of polymer that protect the silica structure against physical or environmental damage.


### • Multimode fiber

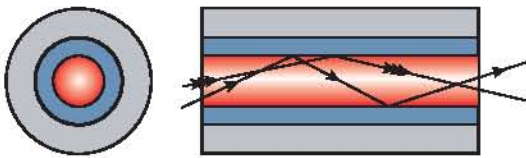


This type of fiber is called “multimode.” Light travels through the fiber following different paths called “modes.”

#### Typical Multimode fiber

50 / 125 or 62.5 / 125




### • Single mode fiber

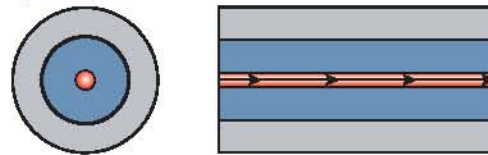

This type of fiber is called “single mode” because only one mode is propagated. It travels “straight” through the fiber. The core diameter is typically 9μm.

#### Typical Single mode fiber

9 / 125




## CHARACTERISTICS OF OPTICAL FIBER

### ■ Attenuation and wavelength

Light is gradually attenuated when it travels through fiber. The attenuation value is expressed in dB/km (decibel per kilometer). Attenuation is a function of the wavelength ( $\lambda$ ) of the light.

This graph shows the attenuation as a function of the wavelength:

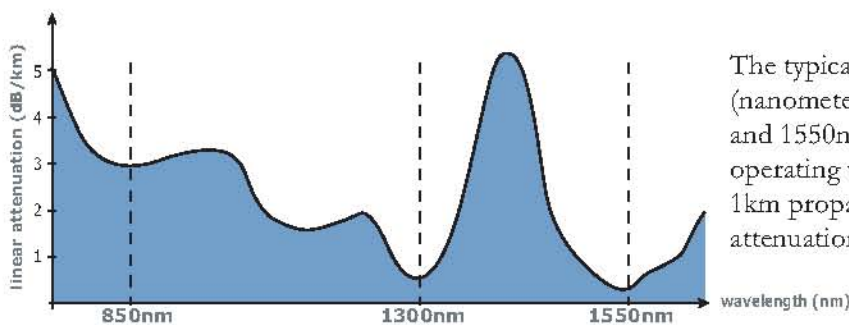


The typical operating wavelengths are 850nm (nanometers) and 1300nm in multimode, and 1310nm and 1550nm in single mode. Example: For an 850nm operating wavelength, there is a 3dB attenuation after 1km propagation (according to the graph). 3dB of attenuation means that 50% of light has been lost.



## ■ Bandwidth

Bandwidth is a measure of the data-carrying capacity of an optical fiber. It is expressed as the product of frequency and distance. For example, a fiber with a bandwidth of 500 MHz•km (Mega-Hertz kilometer) can transmit data at a rate of 500 MHz along one kilometer of fiber. Bandwidth in single mode fibers is much higher than in multimode fibers.

### • Multimode case

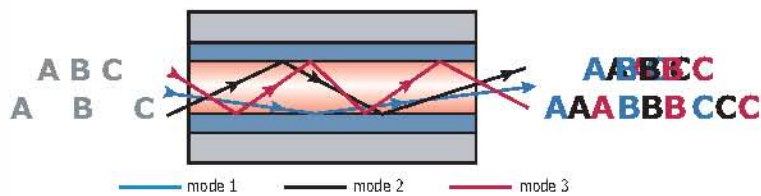

Information (A B C) is propagated in fiber according to N modes or paths, as if it were “duplicated” N times (for example, on the diagram above, the mode 3 path is longer than the mode 2 path, which are both longer than the mode 1 path). If information is too close, there is a risk of overlapping the information, and then it will not be recoverable at the end of the fiber. It is necessary to space the data sufficiently to avoid overlap, i.e. to limit the bandwidth.

### • Single mode case



Information (A B C) is propagated in fiber according to only one mode. Therefore, it is possible to pack information much closer together because it does not overlap other modes.

## ■ WHY CHOOSE FIBER OPTICS?


The main advantages of fiber optics are:

- **Lower loss:** Optical fiber has lower attenuation than copper conductors, allowing longer cable runs and fewer repeaters.
- **Increased bandwidth:** The high signal bandwidth of optical fiber provides significantly greater information-carrying capacity. Typical bandwidths for multimode fibers are between 200 and 600 MHz•km, and > 10 GHz•km for single mode fibers. Typical values for electrical conductors are 10 to 25 MHz•km.
- **Immunity to interference and detection:** Optical fibers are immune to electromagnetic interference and emit no radiation.
- **Electrical isolation:** Fiber optics allows transmission between two points without regard to the electrical potential between them.
- **Decreased cost, size and weight:** Compared to copper conductors of equivalent signal-carrying capacity, fiber optic cables are easier to install, require less duct space, weigh 10 to 15 times less and cost less than copper.

# Understanding Fiber Optics

## FIBER OPTIC CABLES

The coated fiber has a typical external diameter of 250 microns and is fragile. It is usually necessary to build cables to reinforce the fiber to make it more durable and easier to handle. There are many different cable constructions (see examples below).

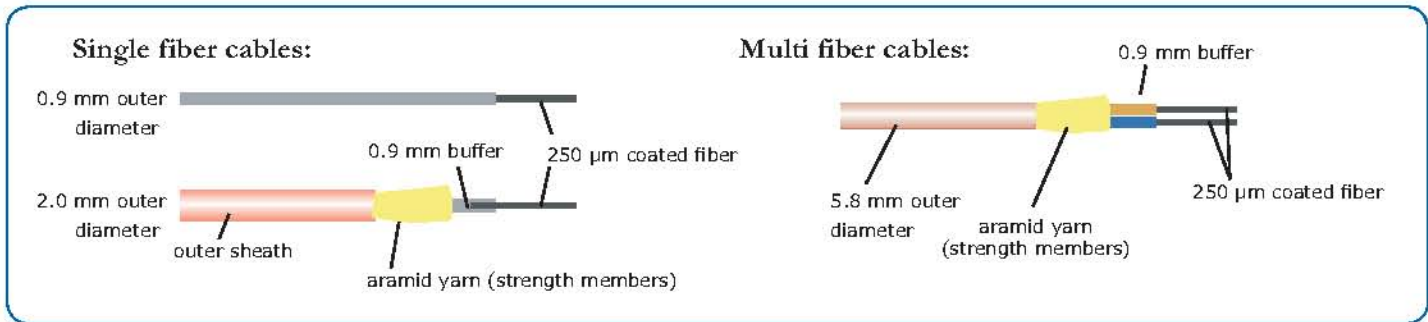

## HOW TO LINK TWO OPTICAL FIBERS

### Two methods to link two optical fibers:

#### 1 - Fusion splice

This operation consists of directly linking two fibers by welding with an electric arc or a fusion splicer.



#### Advantages:

- This linking method is fast and simple
- Light loss generated by fusion splicing is very low

#### Drawbacks:

- Link is relatively fragile
- Link is permanent
- Initial cost of a fusion splicer is high

#### 2 - Use of connectors

A connector terminates the optical fiber inside a ceramic ferrule using epoxy to hold the fiber in place. The connectors can be mated and unmated at any time.



#### Advantages:

- Connection is robust
- Connector can be chosen according to the application
- Connection is removable; it is possible to connect and disconnect two fibers hundreds or even thousands of times without damaging the connectors

#### Drawbacks:

- Connectorization takes longer than fusion splicing and requires specific tools
- Light loss due to connection can be higher than in fusion splicing solution


## CONNECTOR TYPES

### Physical contact

Physical contact connectors utilize fiber in a tightly toleranced ceramic ferrule. This allows easy handling of the fiber and protects it from being damaged.

The different steps to terminate the fiber in the ferrule are:


- Stripping the fiber coating(s).
- Bonding the fiber into the ceramic ferrule with epoxy.
- Polishing the end of the ceramic ferrule to get a smooth finish so the light can easily pass from one fiber to the next.

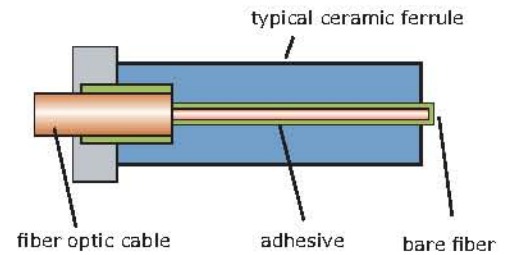

### Physical contact technology





#### Principle:

The principle of the physical contact connectors is the direct contact of polished fibers within two ceramic ferrules. The ferrules are aligned using a ceramic alignment sleeve.

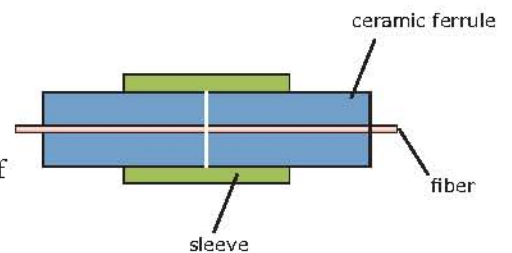

#### Limitations:

Signal loss is a function of the alignment accuracy and the polish quality.

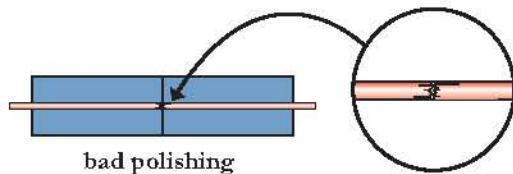

#### Physical contact connector characteristics:

- The loss of light generated by a connection is called Insertion Loss (IL). For physical contact connectors, the IL is generally low (approximately 0.3 dB).
- This is the most common fiber optic connection. It is rugged, repeatable, easy to clean, cost-effective, and performs well.
- This connection performs well against particle contaminants (dust, mud, etc.) and is usually insensitive to liquid contaminants (water or oil). The physical contact pushes liquid out of the way and the liquid does not degrade the connection.
- Physical contact connectors are cleaned by wiping the ferrule with a clean cloth or wipe, spraying with a cleaner, or washing with water.

#### Physical contact connector examples:




## CONNECTOR TYPES

### Expanded beam technology

#### Principle:

The principle of the expanded beam connectors consists of placing a lens at the exit of each fiber widening and collimating the light. In this configuration, there is an air gap between the two optical fibers (lens).

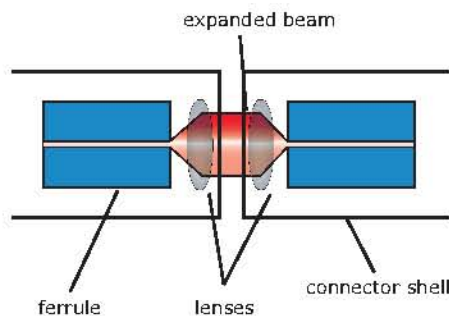

#### Limitations:

The mechanical interface between the connectors must be precise. Dust and dirt must not interfere with the alignment of the optical elements. Expanded beam connectors are less susceptible to particle contaminants such as dust and dirt, but they perform poorly with liquids and films on the lenses. They can also be very difficult to terminate in the field.

#### Lens connector characteristics:

- The loss generated by an expanded beam connection is more than a physical contact connector due to the lenses, mechanical alignment, and sometimes protective windows (approximately 0.8 to 2.5dB typical).
- This type of connection performs well against particle contamination on the lens because the beam is expanded to be much larger than what comes directly from a fiber. However, any liquid or film (such as a fingerprint) on a lens creates significant loss in an expanded beam connector. Expanded beam connectors are also very sensitive to alignment of the lenses. Connectors must always be tightly coupled and kept clean on the mating surface in order to work properly. Cleaning an expanded beam connector must be done with care as any liquid (water, alcohol or another cleaner) that is trapped inside the connector may migrate to the surface of the lens and can cause an unacceptable increase insertion loss.

#### Lens connector examples:




Expanded Beam with Window



Expanded Beam with Ball Lens

## CHARACTERISTICS OF FIBER OPTIC LINKS

This sketch depicts a typical fiber optic interconnection system:

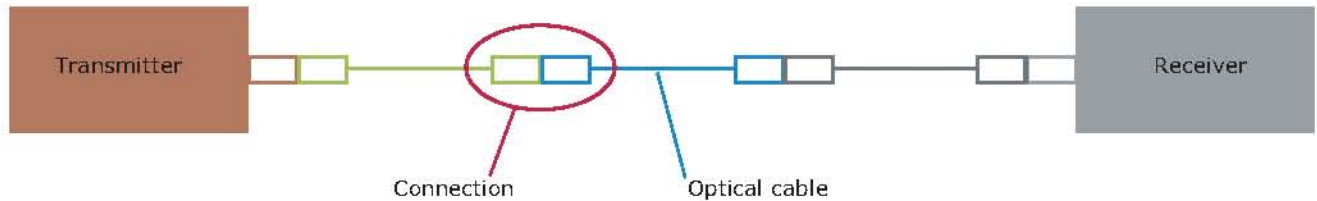

It is comprised of the following elements:

### Transmitter and Receiver (Transceiver)


A transmitter contains a light source. The receiver is a light detector. To design a good fiber optic system, it is important to know:

- The type of light source (LED or type of laser)
- The operating wavelength (1300 nm, for example)
- The optical power of the light source
- The type of the light detector
- The type of connector at the light source output

### One or more optical patchcords

Patchcords are defined by:

- The fiber optic cable described by its length, the number of channels, and the fiber type (single mode, multimode 50/125 or 62.5/125).
- The connectors used in cable terminations
- The Insertion Loss expressed in dB
- The Return Loss expressed in dB. Return Loss is usually specified for single mode systems and patchcords only. Return Loss is the quantity of light which is reflected back by the connector versus the light that continues through. Some laser sources used in single mode applications are sensitive to this phenomenon.

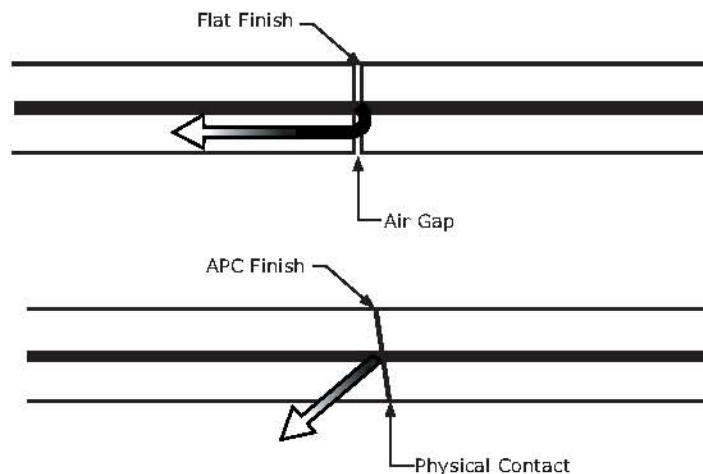

Return Loss Phenomena



## North American Sales Reps

### Eastern Instrumentation

710 E. Main Street  
Morristown, NJ 08057  
856-231-0668 X101  
www.eiphila.com  
Territory: NJ, PA, DE

### Sequel Associates

1501 Main Street  
Tewksbury, MA 01876  
978-851-4010  
www.sequellassociates.com  
Territory: MA, ME, NH, VT,  
CT, RI

### Space Electronics

5525 North McArthur Blvd.  
Suite 135  
Irving, TX 75038  
972-751-0200  
www.texasrep.com  
Territory: TX, LA, OK, AR

### EOX

710 East Main Street  
Moorestown, NJ 08057  
856-231-0668  
www.eoxsales.com  
Territory: DC, MD, VA, NC,  
SC, GA, FL, AL, TN

### Northern Technical Sales

30 Grove Street  
Pittsford, NY 14534  
585-385-6480  
www.ntsny.com  
Territory: NY

### MilComm Engineering and Technical Sales

5730 North Fanwood Avenue  
Lakewood, CA 90713  
562-866-3843  
www.milcomm.net  
Territory: WA, OR, CA

### Trembly Associates Corp.

119 Quincy NE  
Albuquerque, NM 87108  
800-217-2731  
www.trembly.com  
Territory: ID, NV, AZ, UT,  
WY, MT, NM, CO

### KJS-Delta, LLC

P.O. Box 72  
Crystal Lake, IL 60039  
815-788-1002  
www.kjsmarketing.com  
Territory: IL, NE, MO, IA, KS,  
WI, ND, SD, OH, MI, IN, MN

## North American Shipboard Distributors

### Interstate Connecting Components

310A Commerce Drive  
Moorestown, NJ 08057  
856-722-5535  
www.connecticc.com

### Seacoast Electric Company

50 Broadway  
Hawthorne, NY 10532  
914-747-3870  
www.seacoastusa.com

## North American Broadcast Distributors

### Joseph Electronics

6633 W. Howard Street  
Niles, IL 60714  
847-588-3800  
www.josephelectronics.com

### Nemal Electronics

12240 NE 14th Ave.  
North Miami, FL 33161  
305-899-0900  
www.nemal.com

## North American Oil & Gas Sales Reps

### J.A. Davenport Co.

5317 Dora  
Houston, TX 77005  
713-661-5656  
www.jadavenport.com



Amphenol Fiber Systems International, Inc.  
1300 Central Expressway North, Suite 100  
Allen, TX 75013

Phone: 214.547.2400 - 800.472.4225

Fax: 214.547.9344

[www.fibersystems.com](http://www.fibersystems.com)

[info@fibersystems.com](mailto:info@fibersystems.com)

Publication: AFSI-General Cat-F-1.30.07 Specifications subject to change without notice.

© Copyright 2007 - Amphenol Fiber Systems International. All rights reserved.

TFOCA-II®, TFOCA-III®, GoldRush® & StapleMate® are registered trademarks of Amphenol Fiber Systems International.

TFOCA-II® & GoldRush® are covered by U.S. Patents 6,305,849, 6,371,660 and 6,357,929