

# OVERVIEW

## PRODUCT LINES



**AUTOMATION & CONTROL**

**MOTION**

**SWITCHES & POSITION SENSORS**

**ELECTRICAL PROTECTION**

**COCKPIT CONTROLS**

# ABOUT CROUZET

Since 1921, Crouzet has been committed to designing, manufacturing and supplying efficient components for automated systems to serve a wide range of application in the Aerospace & Defense market; in many Industrial equipment markets, with a specific focus on applications such as Access control, Railway, Nuclear and Industrial valves.

Crouzet's product lines include Automation and Control devices, Motion products, Switches and Position Sensors, Cockpit Controls and Electrical Protection products.

Crouzet has a heritage of close collaboration with customers in the development of adapted products to fully customized solutions.

Driven by innovation and customer satisfaction, our teams are focused on delivering the right products and services for the right application, always meeting, and often exceeding customers' expectations.

Crouzet is your trusted partner of choice to face the challenges of today and tomorrow.

Crouzet is a company of InnoVista Sensors™.



InnoVista Sensors™ is a worldwide industrial specialist of sensors, controllers and actuators for automated systems.

Through its brand Crouzet, InnoVista Sensors™ offers a wide range of reliable, efficient and customizable components dedicated to the Aerospace & Defense, Transportation and Industrial markets and segments.

Thanks to the recognized expertise of its teams and a strong innovation policy, InnoVista Sensors™ brings performance enhancing solutions to its customers worldwide.

InnoVista Sensors™: your trusted partner of choice to face industrial challenges of today and tomorrow.

[www.innovistasensors.com](http://www.innovistasensors.com)


## Designs & Manufactures



Sensors



Controls



Actuators

## For



Aerospace & Defense



Transportation



Industry

# CONTENT

	PAGES
<b>Excellence Overview</b>	04
<b>Adaptation Wheel</b>	05
<b>Automation &amp; Control</b>	06-07
<b>Motion</b>	08-09
<b>Switches &amp; Position Sensors</b>	10-11
<b>Electrical Protection</b>	12
<b>Cockpit Controls</b>	13
<b>Note</b>	15

# EXCELLENCE OVERVIEW

## OUR MARKETS



Aerospace & Defense



Railway



Automotive



Access Control



Nuclear



Other Industrial Applications

## OUR QUALITY SYSTEM

### Quality Management

- ISO 9001
- ISO 14001
- ISO 18001

### Automotive

- ISO/TS 16949

### Nuclear

- EDF certification
- RCC-E

### Hazardous Locations

- ISO/IEC80079-34 (ATEX/IECEX)

### Aerospace

- AS/EN 9100
- NADCAP
- EASA approved (Part 21G & Part 145)



# ADAPTATION WHEEL

**Crouzet has developed extensive expertise in adapting its products based on standard ranges, including the necessary project planning skills when it involves a new program.**


## SPECIAL PRODUCT

From the very start of a project, Crouzet's team experts work closely with your teams to develop the specifications.

All our design, industrialization and approval expertise go into developing solutions. We focus our design, manufacturing and qualification expertise on developing a new product designed to meet your requirements.

## STANDARD PRODUCT

A full range of microswitches, limit switches, manually operated switches, motors and geared motors, including AC synchronous, brush and brushless DC and stepper motors, are immediately available so that you can design your system as quickly as possible.

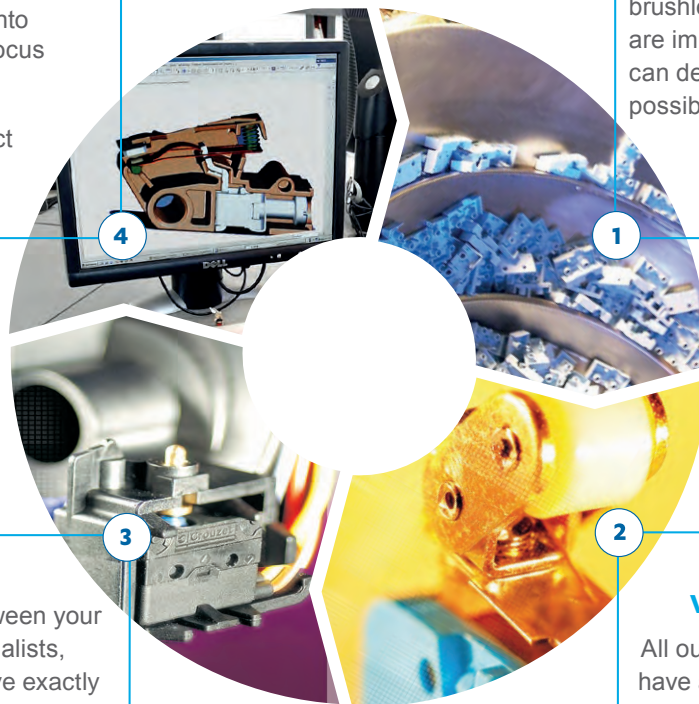

## ADAPTED PRODUCT

Complete coordination between your project teams and our specialists, these adapted products have exactly the right levels of performance and functionality you need for your applications.

All projects are different, so we adapt the performance and functionality of each product to your requirements, ensuring the success of your most complex applications.

## PRODUCT WITH ADDED VALUE

All our standard products can have additional factory-mounted auxiliaries or accessories, including connectors, leads, special terminals, fixings, levers, software etc. Seamless integration into your equipment means you benefit from simpler logistics and optimum installation reliability.

# AUTOMATION & CONTROL

Our experience in physical and electrical values has resulted in an offer which includes timers, monitoring relays, counters, microcontrollers and PLCs.

As a pioneer in the simplification of programming, we offer the easiest-to-use and most adaptable solution for specialized needs.



## MARKETS & APPLICATIONS

- › Building Equipment
- › Water and Waste Treatment
- › Industrial OEMs
- › Renewable Energy
- › Access Control

### TELECONTROLLER

#### em4 Alert



- › Connect your equipment to the 3G GPRS network wherever you are
- › Automatic alerts via text message and e-mail minimize the downtime of machines and systems
- › Simple monitoring and Control via text message
- › Receive data reports via text message or datalogs via email or FTP in .CSV (Excel) file
- › Adapt your application along the way of its lifecycle thanks to the remote application program update feature via FTP



INFO +

### NANO-PLC

#### em4 Ethernet/Local



- › Up to 46 I/Os - Base 16 DI (4 HighSpeed/ 12 AI), 8 DO + 2 Solid State Relays
- › Analog Inputs 4-20 mA, 0-10 VDC and 0-VDC 12 bits
- › Ethernet Modbus TCP/IP (Client/Server) and Modbus RTU RS485 via interface (Master/Slave)
- › Event management & datalog via mail or FTP server
- › PLC performance with the shape and ease of use of a logic controller



INFO +

### LOGIC CONTROLLER

#### Millenium EVO



- › Up to 44 I/Os - Base 16 DI (4 HighSpeed/8 AI) - 8 DO
- › Wireless programming & control with bluetooth Interface and Crouzet Virtual Display
- › Ethernet Modbus TCP/IP (Client/Server) and Modbus RTU Network via interface (Slave)
- › Event and Datalog Management via mail/FTP server or Locally
- › Up to 1000 programing blocks with intuitive Crouzet Soft to go from simple to complex applications



INFO +

#### Millenium 3



- › Highly visible blue LCD with 4 lines of 18 characters and configurable backlighting
- › Allow the use of the entire library of specific functions blocs of the software workshop
- › Extended temperature range (-20 °C → +70 °C)
- › Parameter setting: possibility to choose the adjustable parameters on the front panel



INFO +

### SOFTWARES

- › Visual programming and a wide choice of pre-programmed function blocks for the most intuitive and easy-to-use software, even for new users, and it is free.

<p>Crouzet Soft</p>	<p>Crouzet Virtual Display</p>	<p>Millenium 3 Soft</p>	<p>Crouzet Touch Soft</p>
---------------------	--------------------------------	-------------------------	---------------------------

### COMPLEMENTARIES PRODUCTS: EM4, MILLENIUM EVO, MILLENIUM 3



- › Touch screen 4.3 / 7 / 9.7 pouces
- › Digital extensions and analog extensions
- › T° probes
- › Light sensors
- › Starter kits
- › Powers supplies



INFO +

**MONITORING RELAYS**

**Phase Voltage Current Level**



Key features	› Controls its own supply voltage › LED status › True RMS	› AC & DC voltages › 0.2 mA to 600 V › Choice between under & overvoltage	› AC & DC currents › 2 mA to 10 A, direct › 100 A with CT › Choice between under & overcurrent	› 1 or 2 levels › Probes with AC › Time delay from 0.1 to 5 s
Relay output	1x5 A / 2x5 A	1x5 A / 2x5 A	1x5 A / 1x8 A / 2x5 A	1x5 A / 1x8 A / 2x5 A
Casing width	17.5 - 22.5 - 35 mm	17.5 - 22.5 - 35 mm	17.5 - 22.5 - 35 mm	22.5 - 35 mm
Measurement range	phase sequence phase failure	under & overvoltage	from 2 mA to 20 A	filling (UP) and/or emptying (DOWN)
Supply Voltage	120 → 480 VAC 50/60 Hz	24 → 240 VAC/DC	24 → 240 VAC/DC	24 → 240 VAC/DC

**TIMERS** **COUNTERS**

**SyrLine Chronos 2**



Max counting	0.5 s → 240 H	0.5 s → 240 H	0.055 s → 9999 H	0.5 s → 100 H	0.001 s → 999.999 H
Outputs	1x16 A or 2x8 A	1x8 A or 2x8 A	1x5 A or 2x10 A	1x8 A or 2x8 A	
Dimensions	17.5 mm DIN rail mount	35 mm Removable	48 x 48 mm panel mount	17.5 & 22.5 mm DIN rail mount	24x48 mm / 48x48 mm
Supply	12 → 240 V~	12 → 240 V~	24 → 240 V~	12 → 240 V~	10 → 30 V~ / 24 V~ 90 → 260 V~



**RELATED PRODUCTS: PNEUMATICS COMPONENTS**

- › Human/Machine Interface Components
- › Position Detectors
- › Pressure Switches
- › Electro-Pneumatic Valves
- › Pneumatic Logic Components
- › Industrial Vacuum Components



# MOTION

We provide a complete offer of direct drives, geared motors and motion control solutions for applications where performance is key. Our customized solutions meet most customers' demanding specifications where security, reliability and precision are crucial.

## POSITION, SPEED AND TORQUE REGULATION

	MOTORS					
	Industrial Brush	DCmind Brush	DCmind Brushless	Stepper	Synchronous	
	Ø 32 / Ø 42 Ø 63	Ø 42 / Ø 63	SQ57 SQ75	Ø 35 / 51 Ø 57 / 65	Ø 35 / 51 Ø 57 / 65	
Nominal Power (W)	0,9 → 95	15 → 104	66 → 600	0.5 → 5	0.3 → 3	0.2 → 0.4
Voltage	12 / 24 / 48 VDC	12 → 120 VDC	9 → 75 VDC	3 → 64 VDC	24 → 240 VAC 50 → 60 Hz	
Nominal Speed (rpm)	3000 → 3700	3000	3000	1500	250 → 600	600 / 720
Nominal Torque (mNm)	2.2 → 270	50 → 290	125 → 1900	15 → 300	10 → 110	2.5 → 8
Noise Level (dBA)	55	35	45 / 50	35	30	45
Service Life (hrs)	Up to 5 000	Up to 5 000	20 000	20 000	20 000	10(Mr*) on/off
Gearboxes						
Connection						
More information						





Connector	Cable	Lead	Terminal
Worm	Planetary	Parallel Shaft	Silent



## MARKETS & APPLICATIONS




- › Railway
- › Medical
- › Valves and Pumps
- › Energy Distribution
- › Industrial Automation
- › Access Control
- › Agriculture and Forestry



CONTROL ELECTRONICS				
	Integrated		External	
				
	TNi21	SMi21	SMi22	BDE 30 / BDE 40
Compatible models	SQ57		SQ75	SQ57
Speed Torque	●	●	●	●
Position (c/t)		4096	4096	
Programming		DCmind Soft & DCmind Soft + CANopen	DCmind Soft + CANopen	PWM or 0 → 10 V <sub>DC</sub>
Communication Bus		CANopen Option	CANopen Standard	
Voltage	10 → 36 V <sub>DC</sub>	9 → 75 V <sub>DC</sub>	9 → 75 V <sub>DC</sub>	10 → 36 V <sub>DC</sub>
Maximum Current (A)	17	17	75	14
Adaptations	Programs: Custom firmware as per customer specifications			



INFO 

GEARBOXES			
			
	Spur gear	Planetary	Worm
	10 models	7 models	2 models
Torque (Nm)	0.5 → 6	0.8 → 120	10 → 20
Power (W)	0.2 → 50	8 → 600	25 → 600
Service life (Mr*)	1 → 10	50	50
Ratios	4 → 4500	4 → 308	5 → 100
Options	Shafts: stainless steel, pulleys, pinions, special bearings etc.		



INFO 

\* Million revolutions

## DCMIND SOFT: SIMPLIFIED\*

### DCMIND SOFT (SMI21) & DCMIND SOFT+CANOPEN (SMI21 & SMI22) FOR DCMIND BRUSHLESS

- › Precise configuration of the position, speed and torque
- › The most user-friendly software on the market
- › Two programming modes: application & expert
- › Application programs: dosing, valves, machinery, conveyor belt, access control

\* Free software on our website ([motors.crouzet.com](http://motors.crouzet.com)) or can be supplied on a USB stick in the «starter kit».



# SWITCHES & POSITION SENSORS

As specialist in snap action technologies our offer includes microswitches, limit switches and manually operated switches which are adaptable in terms of connectors, lever or body size.

High quality and reliability products are crucial in harsh environments with severe constraints

## DETECTION & SENSING

Series	MICROSWITCHES								
	Sub-Subminiature		Subminiature			Miniature & Special			
Max Rating @250 Vac (A)	4 A	5 A	5 A	12 A	10 A	6 A	25 A	10 A	10 A
Low level version									
Sealing level	IP67 IP69				IP67 IP69			IP67 IP69	IP65 IP67
Double break									
Operating temperature	-40 °C +90 °C	-55 °C +140 °C	-55 °C +150 °C	-40 °C +150 °C	-40 °C +125 °C	-40 °C +150 °C	-60 °C +150 °C	-40 °C +105 °C	-50 °C +85 °C
Environment									
Approval									

Max Rating @250 Vac (A)	4 A	5 A	5 A	12 A	10 A	6 A	25 A	10 A	10 A
Low level version									
Sealing level	IP67 IP69				IP67 IP69			IP67 IP69	IP65 IP67
Double break									
Operating temperature	-40 °C +90 °C	-55 °C +140 °C	-55 °C +150 °C	-40 °C +150 °C	-40 °C +125 °C	-40 °C +150 °C	-60 °C +150 °C	-40 °C +105 °C	-50 °C +85 °C
Environment									
Approval									

More information



Irradiated environment

## CUSTOMIZED SOLUTIONS


- › Dedicated application
- › Customer specific product
- › Innovation & industrialization





Max Rating @ 250 Vac (A)	10 A	8 A	4A	1 A	1 A
Sealing level	IP66 IP67 IP69	IP66 IP67 IP69	IP66 IP68(4m) IP69	IP66 IP68(18m) IP69	IP66 IP67 IP69
Operating temperature	-40 °C +70 °C	-40 °C +85 °C	-55 °C +125 °C	-55 °C +250 °C	-40 °C +200 °C
Environment					
Approval	  	 			

More Information

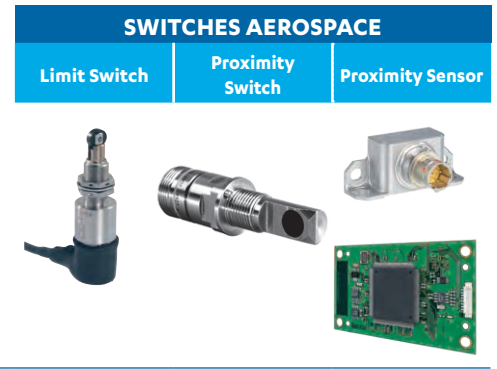

Key features	<ul style="list-style-type: none"> <li>› Hermetically sealed</li> <li>› Customizable</li> <li>› Multi-pole functions</li> </ul>	<ul style="list-style-type: none"> <li>› Contactless detection with integrated electronics</li> <li>› Customizable</li> </ul>	<ul style="list-style-type: none"> <li>› Contactless detection with external electronics</li> <li>› Built-in test capability</li> </ul>
Operating force	2.5 → 50 N	NA	NA
Mechanical life	100 000 cycles	NA	NA
Water proofness	Watertight or hermetic version - DO 160 sect10		
Weight	15 → 300 g	< 60 g	< 50 g
Operating temperature	-55 → +250 °C	-55 → + 125 °C	-55 → + 125 °C

More Information



High pressure up to 6 bar



Explosive atmospheres

## MANUALLY OPERATED SWITCHES

- › Pushbuttons, Momentary and/or Maintained, up to 4 poles
- › Toggles, Maintained and/or Momentary, up to 4 poles
- › Multiway, Momentary
- › Rockers, Momentary and Maintained
- › Triggers, Momentary



# ELECTRICAL PROTECTION

## LIGHT, SIMPLE, SAFE

Specialist in Electrical Protection Devices, our products are involved in advanced electrical equipment onboard aircrafts and helicopters. Our expertise in innovative technologies and our compliance with industry standards has given us the reputation of top player in the aerospace industry.

### ELECTROMECHANICS, MECHATRONICS, ELECTRONICS

Circuit Breaker	Circuit Breaker Panel	Solid State Power Controller
-----------------	-----------------------	------------------------------



Key features	<ul style="list-style-type: none"> <li>› Intrinsic fail safe</li> <li>› Multiple terminal options</li> <li>› Signal contacts</li> </ul>	<ul style="list-style-type: none"> <li>› Illuminated front panel</li> <li>› Qualification documentation for FAA or EASA certification</li> </ul>	<ul style="list-style-type: none"> <li>› Single channel</li> <li>› CAN 2.0 bus communication</li> <li>› Adaptable to customers' requirements</li> </ul>
Power supply	28 VDC & 115 VAC	28 VDC & 115 VAC	28V DC & 115 VAC
Mechanical life	1 M → 7 M FH	20 000 FH	20 000 FH
Quick installation	Pushfit	Pushfit & PWB	NA
Weight	< 20 g	1000 - 4000 g	170 → 250 g
Operating temperature	-55 → +125 °C	-55 → +85 °C	-55 → +70 °C

More information



## MARKETS & APPLICATIONS

- › Commercial Aircrafts
- › Business Jets
- › Military Aircrafts
- › Helicopters
- › Ground Vehicles
- › Landing gear
- › Electrical Distribution
- › Flight Controls



# COCKPIT CONTROLS

With technically-advanced custom grips, control wheels, and buttons, our offer is suitable for major programs worldwide. The large range of pushbuttons and accessories makes it possible to provide solutions for all necessary requirements.

## THE DETAILS THAT MAKE THE DIFFERENCE

	FLIGHT CONTROLS			
	Pushbutton	Multiway	Pilot Grip	Control Wheel
				
Key features	<ul style="list-style-type: none"> <li>› 1, 2, 3, 4 pole</li> <li>› Sealed versions</li> <li>› More than 200 electrical combinations</li> </ul>	<ul style="list-style-type: none"> <li>› Tactile effect</li> <li>› Silver &amp; gold terminals</li> <li>› Different hat shape and color</li> </ul>	<ul style="list-style-type: none"> <li>› Ergonomy and functions access</li> <li>› Aluminium castings or injected in advanced plastic composite</li> <li>› Highest level of finishing</li> </ul>	<ul style="list-style-type: none"> <li>› Comfort and aesthetics</li> <li>› Best in class quality</li> <li>› Leather finishing</li> </ul>
Operating force	8N → 16N	3N → 6N	90 daN	150 daN
Mechanical life	300 000	500 000	35 000 FH	35 000 FH
Water proofness	DO 260 cat W	DO 260 cat W	DO 260 cat W	DO 260 cat W
Weight	3.6 g → 7.7 g	7.3 g → 15.7g	420 g → 780 g	960 g → 1 250 g
Operating temperature	-55 °C → +85 °C	-55 °C → +85 °C	-55 °C → +85 °C	-55 °C → +85 °C

More information







**AMERICAS**
**CANADA**

Tel.: +1 (855) 929-5465  
americas.custserv@crouzet.com

**MEXICO**

Tel.: +1 (855) 929-5465  
americas.custserv@crouzet.com

**USA**

+1 (855) 929-5465  
americas.custserv@crouzet.com

**COUNTRIES NOT LISTED**

+1 (855) 929-5465  
americas.custserv@crouzet.com

**EUROPE / MIDDLE EAST / AFRICA**
**BELGIUM**

Tel.: +32 (0) 2 620 06 05  
Fax: +32 (0) 2 461 00 23  
klantenservice@crouzet.com

**FRANCE**

Tel.: +33 (0) 475 802 101  
Fax: +33 (0) 475 828 900  
relationclient@crouzet.com

**GERMANY / AUSTRIA**

Tel.: +49 (0) 2103/9385930  
Fax: +49 (0) 2103/980-222  
kundenservice@crouzet.com

**ITALY**

Tel.: +39 (02) 38 594 099  
Fax: +39 (02) 82 952 104  
assistenzaclienti@crouzet.com

**SPAIN / PORTUGAL**

Tel.: +34 (91) 215 80 95  
Fax: +34 (93) 2 20 02 05  
atencionalcliente@crouzet.com

**SWITZERLAND**

Tel.: +41 (0) 225 67 57 90  
Fax: +41 (0) 565 88 02 75  
kundenservice@crouzet.com

**THE NETHERLANDS**

Tel.: +31 (0) 20-654 52 20  
klantenservice@crouzet.com

**UNITED KINGDOM**

Tel.: +44 (0) 2076 600 025  
customer.relation@crouzet.com

**COUNTRIES NOT LISTED**

Tel.: +33 (0) 475 802 102  
Fax: +33 (0) 475 828 900  
customer.relation@crouzet.com

**ASIA / PACIFIC**
**CHINA**

Tel.: +86 (21) 8025 7166  
Fax: +86 (21) 6107 1771  
china@crouzet.com

**INDIA**

Tel.: +91 (80) 6762 4501/500  
india@crouzet.com

**SOUTH KOREA**

Tel.: +82 (2) 2679 8312  
Fax: +82 (2) 2679 9888  
korea@crouzet.com

**EAST ASIA PACIFIC**

Tel.: +86 (21) 8025 7177  
Fax: +86 (21) 6107 1771  
eap@crouzet.com

**Warning:**

The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet Automatismes SAS and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.